



35 / 40 W Polycrystalline Solar Module




Warranty
 10-year repair and workmanship warranty
 12-year warranty at 90% power output
 25-year warranty at 80% power output

Typical Electrical Characteristics

| Models | NHN-35W-PS | NHN-40W-PS |
|--------------------------------|------------|------------|
| Max. Power (Pmax) | 35Wp | 40Wp |
| Optimum Operating Voltage (Vm) | 17.2V | 17.8V |
| Optimum Operating Current (Im) | 2.04A | 2.25A |
| Open-circuit Voltage (Voc) | 21.4V | 22.4V |
| Short-circuit Current (Isc) | 2.16A | 2.38A |
| Module efficiency | 12.7% | 14.5% |

Note: the specifications are obtained under the Standard Test Condition (STC): 1,000W/m², Am 1.5, Cell Temperature 25°C

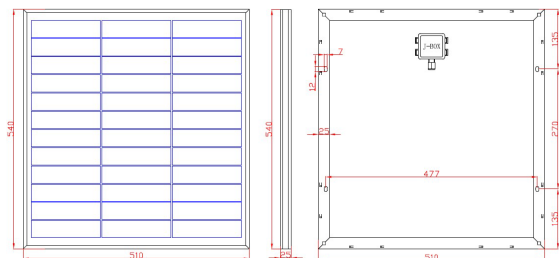



| | |
|----------------------------------|----------------------------------|
| Solar cell | Poly-crystalline 156×39mm |
| Power Tolerance (Pmax) | 0 ~ +3% |
| Numbers of cells | 36pcs of cells in series |
| Module Dimension | 540×510×30mm |
| Weight | 3.5Kg |
| Max. System Voltage | 1000V DC |
| Max. Series Fuse Rating | — |
| Temperature cycling range | -40°C ~ +85°C |
| NOTC | 47°C |
| Temperature coefficients of Isc | (+0.06%/°C) |
| Temperature coefficients of Voc | (-0.35%/°C) |
| Temperature coefficients of Pmax | (-0.4%/°C) |
| Load Capacity | 1200pcs/ 20'GP 2700pcs/ 40'GP |

35 / 40 W Polycrystalline Solar Module


Functional Features

- Applies to commercial, residential applications for off-grid applications.
- Produced with strict quality control standards and a worldwide certification program.
- Easily installed on the ground, roof, building face or tracking system.
- Reduces electricity cost and creates energy independently.
- Modular, no moving parts, fully scalable and easily installed.
- Reliable and virtually maintenance-free power generation.
- Helps environment by reducing air, water and land pollution.
- Provides clean, quiet and reliable electricity generation.

I-V CURVE

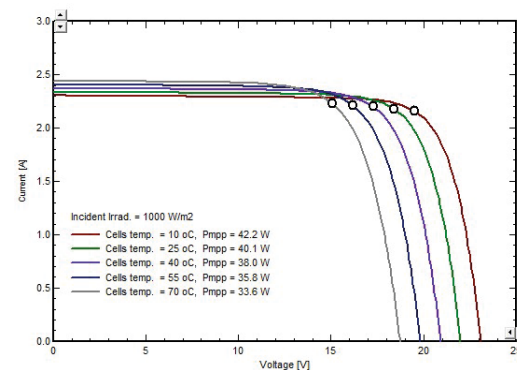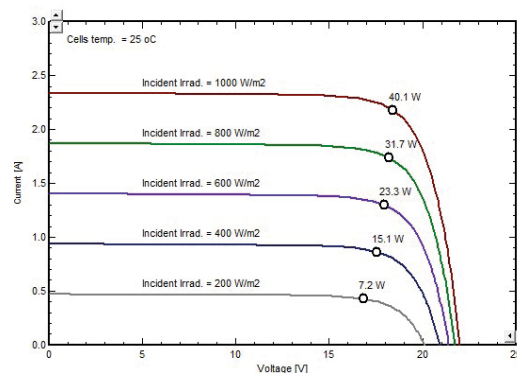

Certification

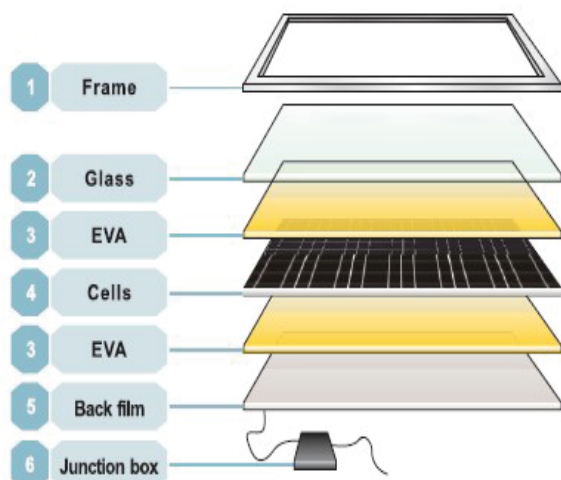

The Structure of Solar Modules

Cells

The hi-efficiency of mono and poly solar cells ensure adequate power for panels.

Glass

Low-iron tempered glass, 3.2mm thickness with higher reflectivity.

EVA

Higher transmission rate, antioxidant capacity and temperature resistance, no expansion or contraction.

Back film

Increase efficiency of modules slightly and reduce module's temperature. Aging resistance, corrosion resistance and airtight.

Aluminum Frame

Using the framework of the anodized aluminum frame with high intensity, mechanical shock resistance capacity.